



ENERGY RECUPERATION



CARMA® 9035

Very high efficiency (90%),
high performance, self-regulating
double flow unit. Econological solution®
Flow rate 200 to 4500 m³/h

02





APPLICATION

- ▲ Very high efficiency and high performance ventilation and self-regulating energy recuperation for office and industrial installations.
- ▲ Performance greater than **90%** (EN308) compliant with **RT2012** and **ErP directive 2009/125/EC**.
- Air filtration, temperature control.
- ▲ One-piece, compact, smart (EN 15232) and plug and play unit.

RANGE

- Available in 6 sizes and 7 models, the **CARMA®** range covers flow rates from 200 to 8000 m³/h. Each **CARMA®** model has two programmable flow rates as standard to be selected on commissioning.

The **CARMA®** range is available in 5 versions:

SEASON : Central for use in moderate climatic zone, intended for the renewal of air of buildings(ships) with energy recovery, functioning summer / winter of the bypass, the regulation of flow spleens by potentiometer.

FIRST : self-regulating unit for use in temperate climate areas.

SMART : Central self regulated with electric drum kit of defrosting for compensation with outside temperature until -20°C.

PREMIUM : self-regulating unit fitted with a hot water coil or an electric coil for external temperatures down to -10°C.

INFINITE : Idem finish PREMIUM with as standard an electric drum kit of defrosting for outside temperatures until -20°C.

CONSTRUCTION

- ▲ Structure in aluminium profile with **thermal breaks using** polyamide spacers built in to the profile (class TB2 in accordance with EN1886).
- Corners in reinforced polyamide.
- Double skin panels 10/10e.
- ▲ Insulation: 50 mm high density A1 (MO) mineral wool (class T2 and L1 for air tightness of the envelope in accordance with EN1886).
- External face: RAL 7035 pre-lacquered metal sheet with protective film.
- Internal face: galvanized steel.
- ▲ Circular branch connections with lip seals to guarantee the systems are airtight (ATEC CSTB n° 13-224-12), square for 9070.
- Brackets crimped into the structure for fixing to the ground (9008 to 9070) or ceiling (9008 to 9035).
- ▲ "EASY" technical compartment holding the electrical components and regulation system. Access by hinged door with latch incorporating the IP65 control panel with LCD display and local padlockable switch on the front panel, potentiometers (version **SEASON**).
- ▲ Access to internal components by security latch on removable panels.
- Condensate tray and removal of condensates.
- ▲ **100% internal bypass**, motorised and self-regulating (**RT2012** air relationship).

MOTOR FANS

- Fans with free impellers.
- ▲ Direct drive DC motor with high efficiency electronic commutation (**EC**), integral thermal cut-out and speed variation. **EC** technology is an ecological® solution guaranteeing low energy consumption (**RT2012**) for the management, checking and control of the operating point (regulation of flow rates from 10 to 100%). Low sound levels for better acoustic comfort.

HEAT EXCHANGER

- Echangeur statique haut rendement à **contre-courant**. à plaque d'aluminium. Echangeurs air - air produits par KLINGENBURG qui participe au programme **Eurovent** certification pour les AAHE.
- ▲ Efficiency greater than 90% (**EN 308**) under operating conditions as follows:
 - Fresh air -10°C/90% - Return air 20°C/50%.
- Automatic defrost by proportional opening of the bypass (except **SEASON**, All or nothing) and possible modulation of the flow misses Fresh air on versions **FIRST** and **PREMIUM**, and by autorégulée electric drum kit on version **SMART** and **INFINITE**.



FILTERS

- ▲ As standard, the **CARMA®** unit has a high efficiency F7 opacimetric filter (large filtration surface) on the fresh air intake and a G4 gravimetric filter on the extracted air intake.
- Filters are always mounted upstream of components to ensure they are protected.
- Mounted on runners fitted with lip seals to ensure effective air tightness.


EQUIPMENT AND FEATURES

The **CARMA®** central has finishes allowing to assure an optimal climatic comfort (except **SEASON**).

- ▲ Regulation "EASY" integrated(joined) with bulletin board into facade IP65 for internal or outside, communicating installation in **MODBUS**, **BACNET** or **WEB** (choice of on-site actionable language). Possibility of associating or a remote control LCD (100 m or 1 km with repeater) or a tactile remote control with interfaces and screens user for the main functions(offices) (check(control) temperature, relaunching(reflation), defect) as well as an interface maintenance allowing to reach the general parameters (command(oder) déportable until 100 m).

- ▲ **100% bypass**, internal to the unit, fitted with servomotors automatically controlled by the integrated regulation system providing **FREE-COOLING** and **NIGHT-COOLING** functions (night over-ventilation with adjustable flow rate). To release the **SEASON**

- 100 % **Bypass** ensures management summer / winter mode All or Nothing with integrated thermostats.

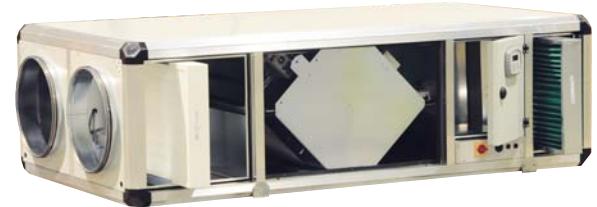


Configurations

HORIZONTAL MOUNTING FLOWS SIDE BY SIDE

(View from above))

Configuration L




Configuration P




VERTICAL MOUNTING FLOWS ONE ABOVE THE OTHER

(View from access side)

Configuration W



Configuration Y



→ Fresh air

→ Return air



- ▲ Large selection of flow rate adjustments to guarantee optimum energy consumption (RT2012, EN 15232).
- Temperature probes (x4) incorporated into the unit: air supply, extraction, defrosting by bypass, external temperature and a probe for The SMART-versions and the INFINITY a probe for the battery of defrosting.
- Integrated antifreeze thermostat (THA) providing protection for the hot water coil for the PREMIUM/INFINITY BC version.
- Integrated manually-reset safety thermostat (THS) providing protection electric batteries defrosting and heating for versions SMART, PREMIUM and INFINITY.
- Internal timers allow operation at two flow rates, programmable on-site at will (except SEASON).
- Weekly, holiday and public holiday timer (except SEASON).
- ▲ New air filter fouling pressure switch with fault notification on request (contact sec for SEASON).
- Pressure switch controls the flow of air across each fan with fault notification on control panel (contact sec for SEASON).
- ▲ Padlockable local circuit breaker mounted on front panel.
- ▲ Fire safety function (except SEASON) allowing control supply and return fans following 5 modes in the control parameters (function can be activated on site). A alarm will be displayed on the "Fire Alarm" screen:
"Off": Complete shutdown of the central
"On": Starting or maintaining the plant in GV. Function fire will override all other alarms.
"Auto": Hold the central depending on the setting made on website (Off / LS / HS)
"On blowing": Starting or maintaining in GV fan blowing (taken off)
"On recovery": Starting or maintaining in GV return fan (Blowing off)

In it, the CARMA® central has a digital entrance " External Stop " which allows to link on-site a manual control. In this case, the external control is priority on the fire safety possibly activated by one of the 5 modes above.

▲ **Dehumidifying** function (activated depending on the site sauf SEASON). It is possible to associate the central CARMA® a module COMBIBOX CONCEPT® equipped with a cooling coil (water or DX cooling only) followed by a heating coil (water, electric or DX). In this case the controller automatically manage hot and cold intake necessary dehumidifying while maintaining a temperature optimum operating. During the application period cold, temperature management overrides that of dehumidifying.

INSTALLATION

- ▲ Vertical or horizontal (except CARMA® 9048 and 9070).
- Indoors or outdoors (rain hood optional).
- In false ceiling (9008 to 9035).
- ▲ New and innovative configurations (E and F) for CARMA® 9070 with air supply and extraction from below.


OPTIONS CLIMATIQUES

- COMBIBOX CONCEPT® chilled water module (CBX-BF) on all versions and use of changeover possible FIRST and SMART version.
- Direct expansion module CBX-DX to R410A.
- Module dehumidifying on versions FIRST and SMART.
- ▲ "EASY" regulation built in to the CARMA® for managing the heat modules described above.



DIMENSIONS CHARACTERISTICS

CARMA® model	Ø mm	A mm	B mm	C mm	D mm	E mm	F mm	F1 mm	F2 mm	G mm	J mm	K mm	T ø	SEASON T	FIRST kg	SMART kg	PREMIUM kg	INFINITE kg
9035	500	2625	1515	805	405	705	1520	450	655	640	545	740	3/4	545	550	554	560	564

HORIZONTAL MOUNTING 9035

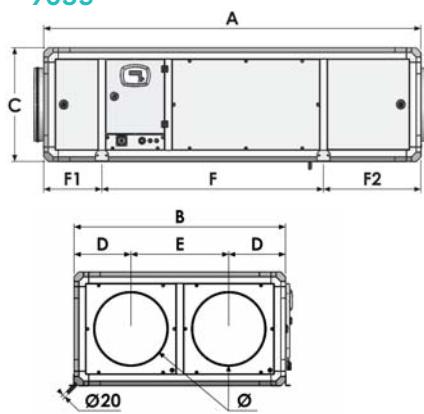

VERTICAL MOUNTING

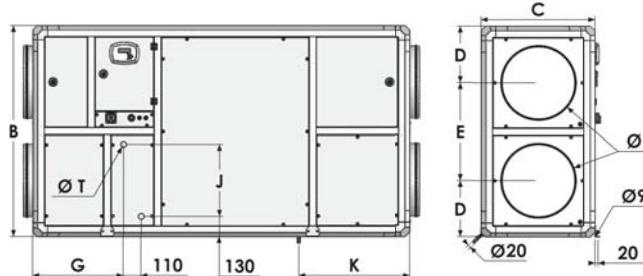


ELECTRICAL CHARACTERISTICS

CARMA® model	Electrical power (W)	Usage temp. (°C / °C)	Protection index Classe	Thermal cutout *	FIRST PREMIUM BC & SEASON		INFINITE BC & SMART		PREMIUM BE			INFINITE BE		
					Power supply voltage (V / Ph / Hz)	Protection current (A)	Power supply voltage (V / Ph / Hz)	Protection current	Power supply voltage (V / Ph / Hz)	Model	Protection current (A)	Power supply voltage (V / Ph / Hz)	Model	Protection current (A)
9035	2x2500	-20 / 40	IP54 / B	PTI	400/3+N/50	7,7	400/3+N/50	19,6	400/3+N/50	BE 067	17,4	400/3+N/50	BE 067	29,3
									BE 137	27,2		BE 137	39,1	

*PTI: Integrated thermal cutout




The CARMA® unit has a factory-programmable regulator as standard used to configure the flow modulations described below:

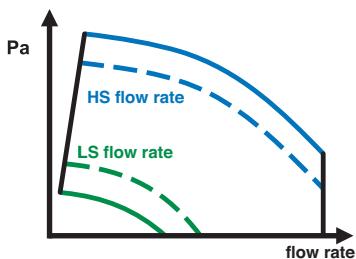


CARMA® operation

1 or 2 flow rates as required (Low Speed(LS)/High speed(HS)) per fan
Except SEASON, 1 flow adjustable spleen by potentiometer

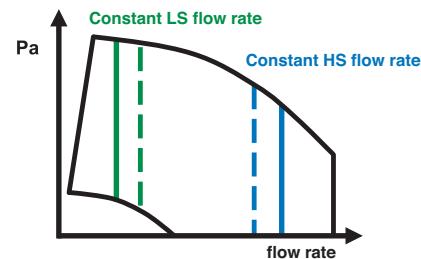


CARMA® + MAC2 EC® operation

Optional 1 or 2 CONSTANT flow rates by fan (except CARMA® 9008)

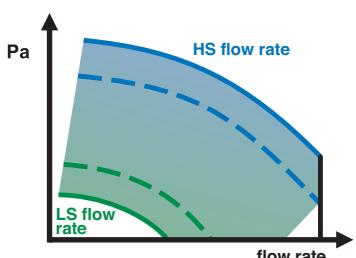


CARMA® + DIVA EC® operation

PROPORTIONAL ventilation between two flow rates (LS/HS) by fan

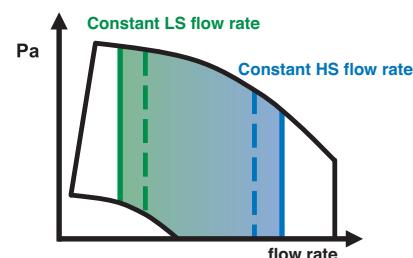

CARMA® + QUATTRO EC® operation

PROPORTIONAL ventilation between two CONSTANT flow rates by fan (except CARMA® 9008)

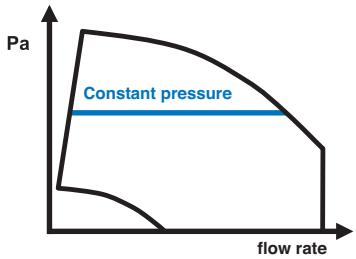

CARMA® + LOBBY EC® operation

CONSTANT PRESSURE ventilation by fan



Internal view of "EASY" technical compartment



Access door to "EASY" technical compartment



Remote control LCD display
(option not compatible with SEASON)
max 100 m or 1000 m with repeater (optional).
Same functionality as the cover display
of the central CARMA®



Touchscreen (option not
compatible SEASON)
with user interfaces and screen
and / or maintenance interface

ECONOLOGICAL SOLUTIONS®

FLOW RATE MODULATION

CARMA®



2



Panneau de commande à affichage LCD "EASY" monté en façade de la centrale **CARMA®** pour réglage horloges, flow rates, température (gestion proportionnelle du bypass interne, de la batterie chaude pour les versions **BC** ou électrique pour les versions **BE**, surventilation nocturne), contrôle et lecture défaut(s)...

CARMA® and FLOW RATE MODULATION	STOP => GV	STOP => PV => GV	STOP => PV	&	PV => GV	FORCED STOP
CARMA® Regulation at 1 or 2 (LS/HS) flow rates except SEASON 1 flow adjustable by potentiometer	TIMER (Except SEASON)	TIMER (Except SEASON)	TIMER (Except SEASON)	&	Contact sec* (CDCPVG2)	"EASY" LCD control or remote control (Except SEASON)
	or	or		or		or
	Dry contact* (CDC1V2)	Dry contact* (CDC2V2)	Dry contact* (CDC2V2)	&	Dry contact* (CDC2V2)	Dry contact* (CDC1V2)
CARMA MAC2 EC® Regulation at 1 or 2 CONSTANT adjustable flow rates ⁽¹⁾	TIMER	TIMER	TIMER	&	Dry contact* (CDCPVG2)	"EASY" LCD control or remote control
	or	or		or		or
	Dry contact* (CDC1V2)	Dry contact* (CDC2V2)	Dry contact* (CDC2V2)	&	Dry contact* (CDC2V2)	Dry contact* (CDC1V2)
CARMA LOBBY® Regulation at adjustable CONSTANT PRESSURE and variable flow rates	TIMER					"EASY" LCD control or remote control
	or					or
	Dry contact* (CDC1V2)					Dry contact* (CDC1V2)
CARMA DIVA EC® Regulation with PROPORTIONAL ventilation between 2 adjustable flow rates			TIMER	&	010V CO2 probe	"EASY" LCD control or remote control
				or		or
					010V CO2 probe	Contact sec* (CDC1V2)
CARMA QUATRO EC® Regulation with PROPORTIONAL ventilation between 2 CONSTANT adjustable flow rates ⁽¹⁾			TIMER	&	010V CO2 probe	"EASY" LCD control or remote control
				or		or
					010V CO2 probe	Dry contact* (CDC1V2)

(1): Except CARMA® 9008 Standard function built in to the unit Standard function built in to the unit

*Dry contact: CDC type remote control/On-Off CO2 probe/On-Off humidity probe/All types of dry contact, etc.





EQUIPMENT	SEASON	FIRST	SMART	Premium BE	Premium BC	Infinite BE	Infinite BC
Low energy consumption, EC fan motors	●	●	●	●	●	●	●
Opacimetric, F7 new air filter	●	●	●	●	●	●	●
Gravimetric, G4 intake filter	●	●	●	●	●	●	●
High efficiency plates (>90%), EUROVENT certified counter-flow exchanger	●	●	●	●	●	●	●
100% internal bypass	●	●	●	●	●	●	●
Inclined condensate trays (exchanger)	●	●	●	●	●	●	●
50 mm, RAL7035 double skin	●	●	●	●	●	●	●
Circular branch connections with lip seals (ATEC CSTB n° 13-224-12)	●	●	●	●	●	●	●
Remote, LCD display control (up to 100m)	-	●	●	●	●	●	●
Regulation MODBUS in RS485 or TCP/IP, BACNET IP, WEB TCP/IP (selected from the menu)	-	●	●	●	●	●	●
Rotation speed regulating potentiometer	●	-	-	-	-	-	-
Discharge temperature sensor	-	●	●	●	●	●	●
Intake temperature sensor	-	●	●	●	●	●	●
Bypass defrost sensor	●	●	●	●	●	●	●
Exterior temperature sensor	●	●	●	●	●	●	●
Defrost battery sensor	-	-	●	-	-	●	●
Anti-freeze thermostat on the water battery	-	-	-	-	●	-	●
Electric safety thermostat defrost battery	-	-	●	-	-	●	●
Electric safety thermostat heating battery	-	-	-	●	-	●	-
Lockable proximity switch	●	●	●	●	●	●	●
Power cord grommet	●	●	●	●	●	●	●
FUNCTIONS	SEASON	FIRST	SMART	Premium BE	Premium BC	Infinite BE	Infinite BC
Bypass defrost	●	-	-	-	-	-	-
Sequenced defrost: bypass + battery (SMART/INFINITE) + new air flow rate modulation	-	●	●	●	●	●	●
Self-regulating, electric, defrost battery	-	-	●	-	-	●	●
Self-regulating, electric, heating battery	-	-	-	●	-	●	-
Self-regulating water heating unit	-	-	-	-	●	-	●
100% internal bypass, All or Nothing, automatic management summer/winter	●	-	-	-	-	-	-
100% internal bypass, self-regulating and modulating (0-100%)	-	●	●	●	●	●	●
Free-Cooling Management	-	●	●	●	●	●	●
Night-cooling management (night-time over-ventilation)	-	●	●	●	●	●	●
Output air temperature management (air regulation)	-	●	●	●	●	●	●
Ambient temperature management (intake)	-	●	●	●	●	●	●
Weekly timer	-	●	●	●	●	●	●
Holiday and public holiday timer	-	●	●	●	●	●	●
New Air filter pressure switch	●	●	●	●	●	●	●
Flow rate control pressure switch (output and intake)	●	●	●	●	●	●	●
Fire safety in accordance with 5 available modes	-	●	●	●	●	●	●
COMBIBOX CONCEPT® dehumidification management module	-	●	●	●	●	●	●
FACTORY INSTALLED OPTIONS	SEASON	FIRST	SMART	Premium BE	Premium BC	Infinite BE	Infinite BC
LOBBY® EC : air flow modulation at CONSTANT PRESSURE	-	○	○	○	○	○	○
DIVA® EC : proportional CO ₂ flow rate modulation	-	○	○	○	○	○	○
MAC2 EC : air flow modulation at CONSTANT PRESSURE	-	○	○	○	○	○	○
QUATTRO EC: proportional adjustment by CO ₂ level between 2 CONSTANT FLOWS	-	○	○	○	○	○	○
OPTIONS	SEASON	FIRST	SMART	Premium BE	Premium BC	Infinite BE	Infinite BC
COMBIBOX CONCEPT® cooling module (water or R410A)	-	◆	◆	-	◆	-	◆
COMBIBOX CONCEPT® dehumidification module	-	◆	◆	-	◆	-	◆
Changeover pad for switching between hot/ cold for CO versions	-	◆	◆	◆	◆	◆	◆
Touch activated remote control (up to 100m)	-	◆	◆	◆	◆	◆	◆
LON networked	-	◆	◆	◆	◆	◆	◆
Ambient temperature management via touch activated remote control	-	◆	◆	◆	◆	◆	◆
1000M LCD repeater for remote control	-	◆	◆	◆	◆	◆	◆
Wonderoom®, networked area regulator	-	◆	◆	◆	◆	◆	◆
Automatically with the CARMA® -	-	◆	◆	◆	◆	◆	◆

● : Standard equipment or functions. ○ : OPTIONAL equipment or functions. Supplied assembled and cabled at the factory

◆ : OPTIONAL equipment or functions. Supplied unassembled

ACOUSTIC CHARACTERISTICS

CARMA®



2

- The Lp4m dB(A) curves correspond to the level of acoustic pressure at 4m in a hemispherical free field on a reflective plain, the "new air inlet" and "discharge intake air" sides not being connected, the "new output air" and "extraction intake air" not being connected. To achieve the overall acoustic pressure Lp dB(A), at a certain distance, add the values below to Lp4m.

Distance (m)	1,5	3	4	5	7	10
Distance weighting dB(A)	9	3	0	-2	-5	-8


- The curves for "Lw output air cond dB(A)" correspond to the overall acoustic power emitted on the "new output air" side or "discharge intake air". To achieve the range of acoustic power Lw cond output dB(A), on the "new output air" or "discharge intake air", add the below values to the acoustic power "Lw cond output" displayed on the curves.

Downstream acoustic spectrum weighting function "Lw cond blower dB(A)" Indicated on the curves								
Frequency	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	
Weighting CARMA 9035 dB(A)	-32	-20	-12	-7	-4	-7	-11	-19

The curves for "Lw cond extraction dB(A)" correspond to the overall acoustic power emitted on the duct sides "extraction air intake" and "new air inlet". To achieve the range of acoustic power Lw cond extraction dB(A), on the "extraction air intake" and "new air inlet" sides, add the values below to the acoustic power "Lw cond extraction" read on the curves

Upstream acoustic spectrum weighting function "Lw cond extraction dB(A)" Indicated on the curves								
Frequency	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	
Weighting CARMA 9035 dB(A)	-21	-13	-7	-5	-8	-9	-15	-21

To achieve the acoustic range NSC4 dB(A) (noise level at 4m in a hemispherical free field, with the device placed on the ground on a reflecting plane, with station terminals connected to the intake and discharge by ducts with the same level of sound insulation), deduct 18 dB(A) from the Lp4m value.

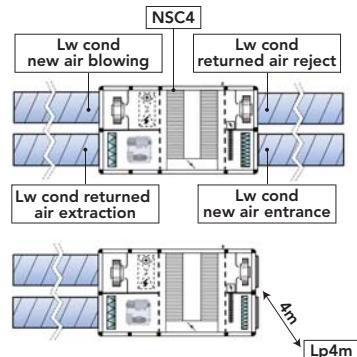

NOTA: Tolerance =
Global Values + / - 3 dB(A)
Acoustic spectra +/- 5 dB(A)

CLIMATIC
SOLUTIONS

CARMA®

The "EASY" regulation system for the **CARMA®** unit enables one or more heat coils to be managed as standard (depending on version, **FIRST**, **PREMIUM** and **INFINITE**):

CARMA® Versions	INTEGRATED HEAT COIL(S)			EXTERNAL MODULE					
	DEFROSTING		HEATING	REFRESH		DEHUMIDIFYING (Cold + Warm)			
	Electric	Electric	Water	Water	R410A	Water/Water	Water/Elec	R410A/Water	R410A/ELEC
FIRST	-	-	-	CBX-BF ⁽²⁾	CBX-DX	CH	CE	DXH	DXE
SMART	✓	-	-	CBX-BF ⁽¹⁾	CBX-DX	CH	CE	DXH	DXE
PREMIUM BC	-	-	✓	CBX-BF	CBX-DX	-	-	-	-
PREMIUM BE	-	✓	-	CBX-BF	CBX-DX	-	-	-	-
INFINITE BC	✓	-	✓	CBX-BF	CBX-DX	-	-	-	-
INFINITE BE	✓	✓	-	CBX-BF	CBX-DX	-	-	-	-

(1) Direct connection to the CARMA® except 9070, or to sheath (option circular connection panels available)

(2) Can be used changeover. Provide patch (see options)


The **CARMA®** range meets all the requirements of the **Bluetech®** concept.
Complies with **EUROVENT**, **RT2012**, **ErP 2009/125/EC** and **EN 15232**.

CETIAT
ensemble, innover et valider

Mesures de rendements thermiques effectuées et validées par le CETIAT



CARMA® 9035

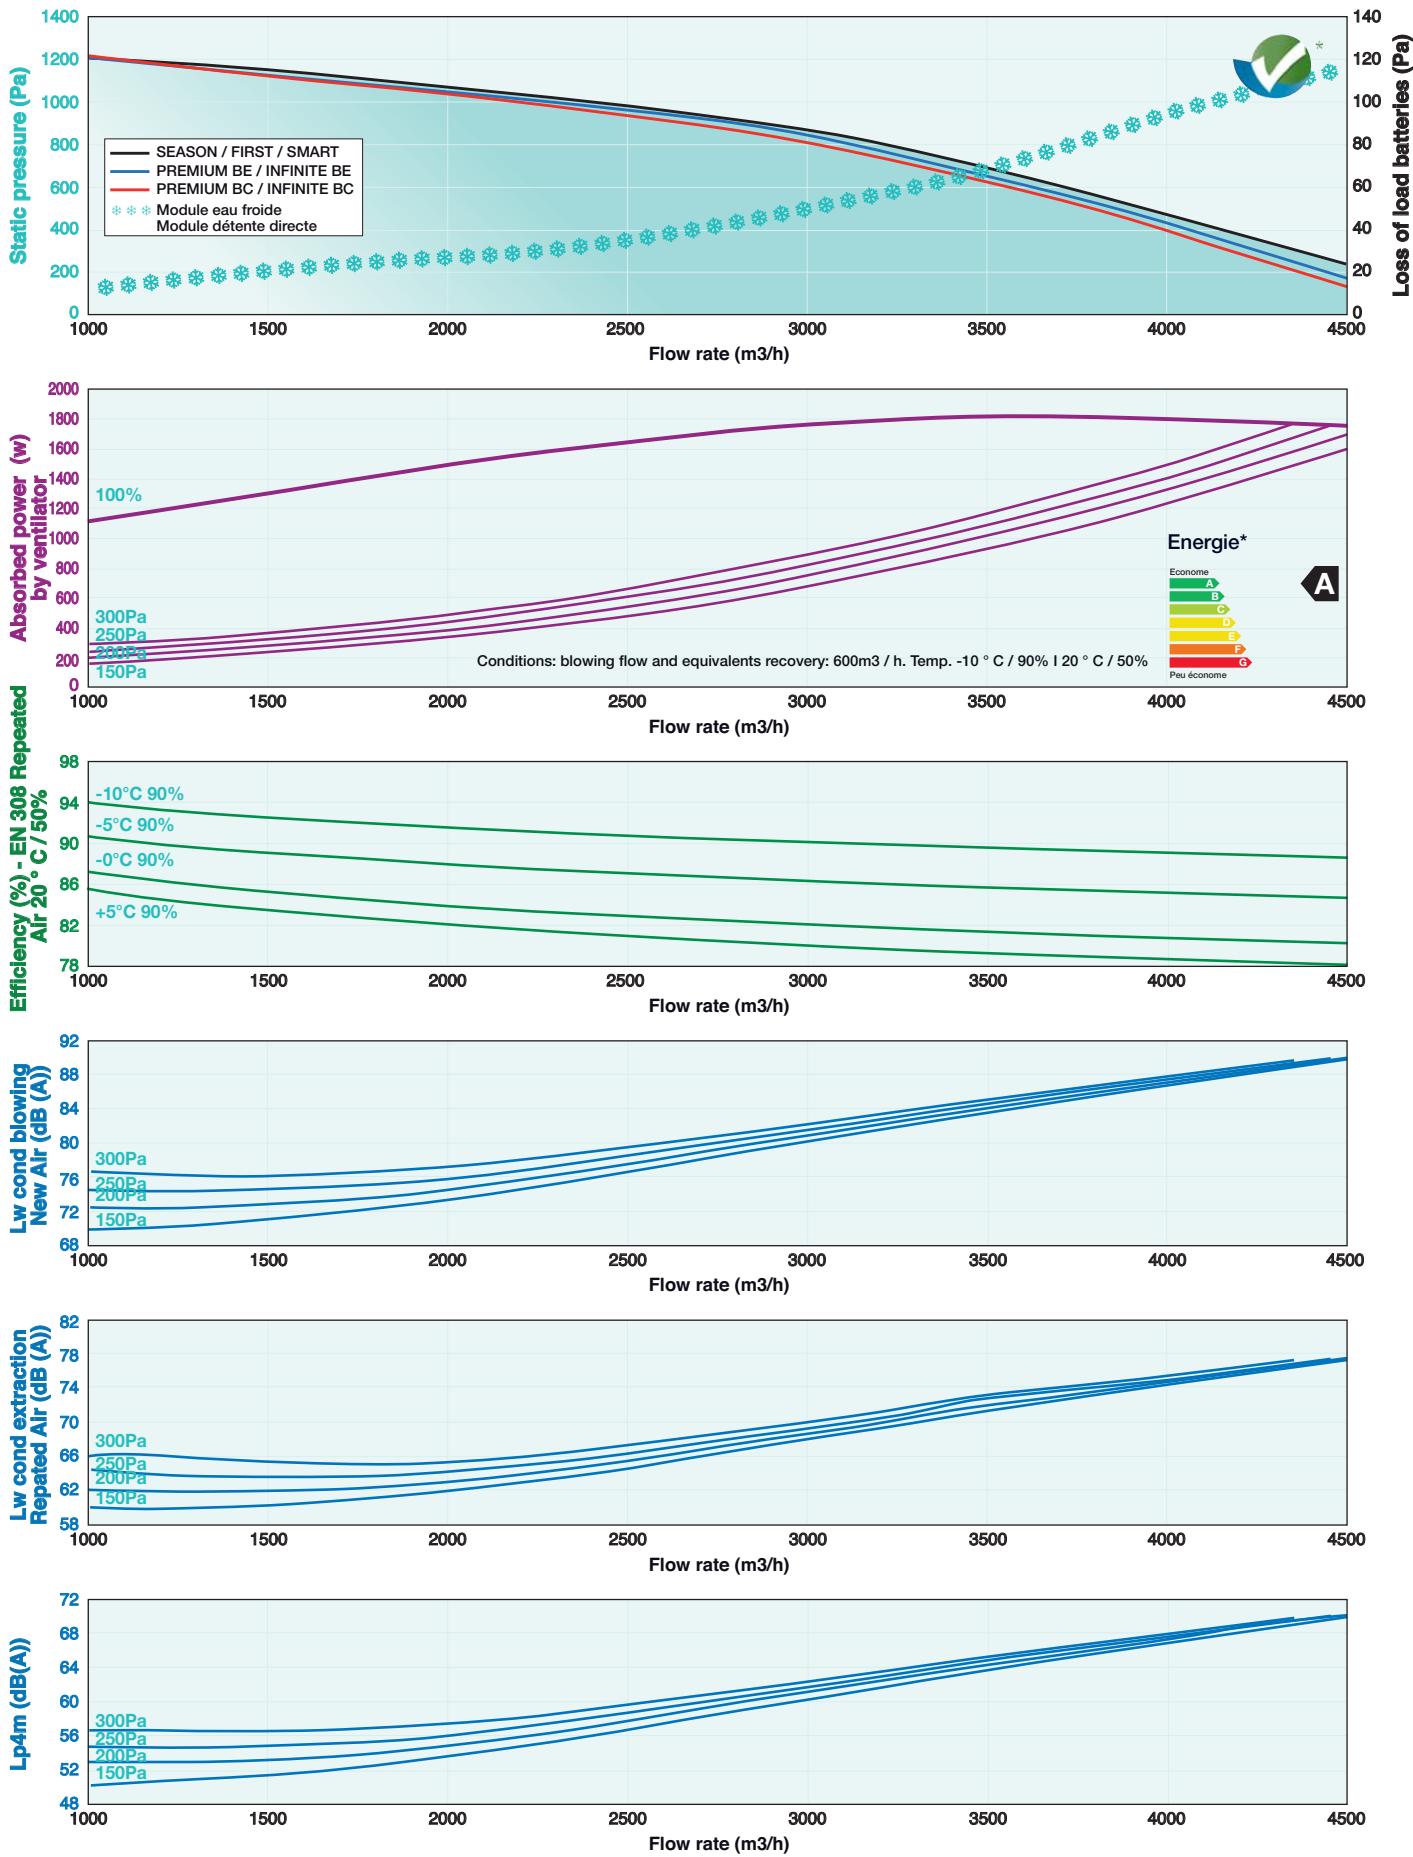

PERFORMANCE CHARACTERISTICS OF 9035 HEAT COILS

CARMA®



2

BC for PREMIUM and INFINITE versions

Hot water coil

Water temp. (°C/°C)	Air inlet temp. (°C)	Flow rate (m³/h)	1500	2100	2700	3300	3900	4500
90/70	11	Motor (kW)/Air outlet temp (°C) 23,2 / 57	29,4 / 53	34,8 / 50	39,6 / 47	44,0 / 45	48,0 / 43	
	15	Water flow(l/h)/DP water (kPa) 1020 / 5	1290 / 6	1530 / 8	1750 / 8	1940 / 10	2110 / 11	
80/60	11	Motor (kW)/Air outlet temp (°C) 21,8 / 58	27,6 / 54	32,6 / 51	37,2 / 49	41,2 / 47	45,0 / 45	
	15	Water flow(l/h)/DP water (kPa) 960 / 5	1220 / 5	1440 / 7	1640 / 7	1820 / 9	1980 / 10	
60/50	11	Motor (kW)/Air outlet temp (°C) 19,5 / 50	24,7 / 46	29,2 / 43	33,2 / 41	36,8 / 39	40,1 / 38	
	15	Water flow(l/h)/DP water (kPa) 860 / 4	1080 / 6	1280 / 6	1460 / 8	1620 / 7	1760 / 8	
45/40	11	Motor (kW)/Air outlet temp (°C) 18,1 / 51	22,9 / 48	27,0 / 45	30,7 / 43	34,0 / 41	37,1 / 40	
	15	Water flow(l/h)/DP water (kPa) 800 / 3	1000 / 5	1190 / 5	1350 / 7	1490 / 8	1630 / 7	
40/35	11	Motor (kW)/Air outlet temp (°C) 14,7 / 40	18,6 / 38	22,1 / 35	25,2 / 34	28,0 / 32	30,5 / 31	
	15	Water flow(l/h)/DP water (kPa) 1280 / 6	1630 / 8	1930 / 10	2200 / 13	2440 / 16	2670 / 17	
35/30	11	Motor (kW)/Air outlet temp (°C) 13,3 / 41	16,8 / 39	20,0 / 37	22,7 / 36	25,2 / 34	27,5 / 33	
	15	Water flow(l/h)/DP water (kPa) 1160 / 5	1470 / 8	1740 / 9	1990 / 11	2210 / 13	2410 / 15	
30/25	11	Motor (kW)/Air outlet temp (°C) 10,1 / 31	12,8 / 29	15,1 / 28	17,2 / 27	19,1 / 26	20,8 / 25	
	15	Water flow(l/h)/DP water (kPa) 1750 / 6	2212 / 7	2618 / 10	2982 / 13	3318 / 16	3626 / 18	
25/20	11	Motor (kW)/Air outlet temp (°C) 8,7 / 32	11,0 / 31	13,0 / 29	14,8 / 28	16,4 / 28	17,9 / 27	
	15	Water flow(l/h)/DP water (kPa) 1498 / 6	1904 / 7	2254 / 8	2562 / 10	2842 / 12	3108 / 14	

BE for PREMIUM and INFINITE versions

Electric coil

Fresh air Flow rate (m³/h)	0°C 3500	0°C 3500	-5°C 3500	-10°C 3500	-15°C 3500	-20°C 3500
Version	Season / First	Premium BE067	Premium BE135	Infinite BE067	Infinite BE135	
		Heating coil		Preheating + heating coil		
Total power kW	-	6,75	6,75	13,5	8,25 + 6,75	8,25 + 13,5
Temp. °C on output from the unit	16,7	22,5	22	20,2	19,5	20,5

CBX 7 BF

Module cold water and battery changeover

Water temp. (°C/°C)	Air inlet temp. (°C-%HR)	Flow rate (m³/h)	1500	2100	2700	3300	3900	4500
7/12	32-40	Power (kW)/Air outlet temp (°C-%HR) 13,8 / 13,9-2	17,9 / 14,1-89	21,6 / 14,9-87	25,0 / 15,6-86	28,0 / 16,2-84	30,9 / 16,7-83	
		Water flow(l/h)/DP water (kPa) 2370 / 9	3070 / 12	3710 / 17	4280 / 20	4810 / 25	5300 / 29	
	27-50	Power (kW)/Air outlet temp (°C-%HR) 10,6 / 12,5-94	13,7 / 13,4-92	16,5 / 14,1-91	18,9 / 14,6-89	21,2 / 15,1-88	23,3 / 15,5-87	
		Water flow(l/h)/DP water (kPa) 1820 / 5	2350 / 9	2820 / 10	3250 / 13	3630 / 16	3990 / 18	
6/11	32-40	Power (kW)/Air outlet temp (°C-%HR) 14,9 / 12,1-91	19,3 / 13,3-89	23,3 / 14,2-87	26,9 / 14,9-85	30,3 / 15,6-84	33,4 / 16,1-83	
		Water flow(l/h)/DP water (kPa) 2550 / 10	3310 / 14	3990 / 18	4620 / 23	5190 / 28	5730 / 32	
	27-50	Power (kW)/Air outlet temp (°C-%HR) 11,7 / 11,7-94	15,1 / 12,6-92	18,2 / 13,3-90	20,9 / 13,9-89	23,5 / 14,4-88	25,9 / 14,9-87	
		Water flow(l/h)/DP water (kPa) 2000 / 6	2590 / 10	3110 / 12	3590 / 16	4030 / 18	4430 / 21	
45/40	25-50	Power (kW)/Air outlet temp (°C-%HR) 9,3 / 11,5-94	12,0 / 12,3-92	14,3 / 12,9-91	16,4 / 13,5-89	18,4 / 13,9-88	20,2 / 14,3-87	
		Water flow(l/h)/DP water (kPa) 1590 / 4	2050 / 7	2450 / 9	2810 / 10	3150 / 12	3460 / 15	
11	11	Power (kW)/Air outlet temp (°C-%HR) 13,7 / 38	18,1 / 37	22,1 / 35	25,7 / 34	29,1 / 33	32,2 / 32	
		Water flow(l/h)/DP water (kPa) 2394 / 4	3150 / 7	3836 / 8	4466 / 11	5054 / 14	5600 / 15	
15	15	Power (kW)/Air outlet temp (°C-%HR) 11,9 / 39	15,7 / 37	19,1 / 36	22,2 / 35	25,1 / 34	27,8 / 34	
		Water flow(l/h)/DP water (kPa) 2072 / 5	2730 / 5	3318 / 8	3864 / 8	4368 / 10	4830 / 13	

CBX 7 DX

Battery module reversible direct expansion R410A

Evap. Temp. (°C)	Air inlet temp. (°C-%HR)	Flow rate (m³/h)	1500	2100	2700	3300	3900	4500
7	32-40	Power (kW) 14,3	18,3	21,6	24,6	27,1	29,4	
		Air outlet temp (°C-%HR) 12,6-91	13,9-89	14,9-87	15,8-85	16,5-84	17,1-83	
	27-50	Power (kW) 11,5	14,7	17,4	19,8	21,8	23,6	
		Air outlet temp (°C-%HR) 11,8-94	12,9-92	13,7-90	14,4-89	15,0-88	15,5-87	
5	32-40	Power (kW) 9,4	12,0	14,1	16,1	17,8	19,3	
		Air outlet temp (°C-%HR) 11,4-94	12,3-92	13,0-91	13,6-89	14,1-88	14,5-87	
	27-50	Power (kW) 16,1	20,5	24,3	27,5	30,4	32,8	
		Air outlet temp (°C-%HR) 11,1-91	12,6-89	13,8-87	14,8-85	15,6-84	16,3-82	
40	25-50	Power (kW) 13,2	16,9	20,0	22,8	25,2	27,2	
		Air outlet temp (°C-%HR) 10,4-93	11,5-91	12,5-90	13,3-89	14,0-88	14,5-87	
	11	Power (kW) 12,5	16,5	20,1	23,5	26,6	29,5	
		Air outlet temp (°C) 35,9	34,5	33,3	32,2	31,4	30,6	
15	15	Power (kW) 10,7	14,2	17,3	20,2	22,8	25,3	
		Air outlet temp (°C) 36,4	35,2	34,1	33,2	32,5	31,8	

Temp. de condensation (°C)

P179



• SECURITY AND CONTROL



PRESSOSTAT FOULING
ref. DEP

Return air Filter (IP54)



MANOMETER WITH LIQUID J
ref. MANO



SMOKS ALARM
ref. CDAD

Cabinet (IP54)

• MODULATION FLOW



DEPORTED COMMAND
ref. POT VF

Potentiometer only for SEASON (IP54)



COMMANDED OUTSTRIP COMFORT
ref. CDC2V2

STOP /PV/GV 2 Ventilators CASE (IP54)



COMMANDED OUTSTRIP COMFORT
ref. CDC PVGV2

PV/GV 2 Ventilators CASE (IP54)



PRESENCE DETECTOR
ref. 360 TOR SA

ON/OFF or PV/GV(SEASON incompatible version)



BOX RELEASE ref. BD

TBTS 24 or 48Vcc

CASE (IP67)



COMMANDED OUTSTRIP COMFORT
ref. CDC1V2

ON/OFF

2 Ventilators CASE (IP54)

• CLIMATIC




DUCT HUMIDITY SENSOR
ref. HR 010 SG

Signal 0-10V (SEASON incompatible version)




THERMOSTAT REVERSER SUMMER/WINTER
ref. CHANGEOVER PAD

For PREMIUM/INFINITE BC versions + CBX module cold water




COLD WATER MODULE
ref. CBX BF

Version SEASON non compatible
Duct installation (see
COMBIBOX CONCEPT® documentation)



COLD WATER MODULE
ref. CBX FC

Module coupled to the central
(See documentation COMBIBOX CONCEPT® for descriptions).
SEASON versions not compatible
size 9070



DIRECT EXPANSION MODULE R410A
ref. CBX DX

Installation in girdle (see COMBIBOX CONCEPT® documentation).
SEASON incompatible version



DIRECT EXPANSION MODULE R410A
ref. CBX FX

Module coupled to the central
(See documentation COMBIBOX CONCEPT® for descriptions).
SEASON versions not compatible
size 9070




DUCT HUMIDITY SENSOR
ref. HR 010 SA

Signal 0-10V (SEASON incompatible version)



DEHUMIDIFYING MODULE
ref. CBX --

Installation in girdle (see
COMBIBOX CONCEPT® documentation)



REGISTER ref. RM

Frost protection.
Waterproof class 4



SERVOMOTOR ALL OR NOTHING ref. STOR 24 FROST

Led by regulation EASY
(Except SEASON)



SOLENOID VALVE KIT
ref. KEI IP44

PREMIUM versions / INFINITE PC
For indoor installation.



SOLENOID VALVE KIT
ref. KEE IP54

PREMIUM versions / INFINITE PC
For outdoor installation.



WALL CONTROL TOUCH
ref. EDTOUCH

SEASON incompatible version.
Max 100 m



WALL CONTROL LCD
ref. E3-DSP-CLD

SEASON incompatible version.
Max 100 m



REPEATER
réf. REPEATER 1M

SEASON incompatible version.
To deport the standard wall
command supplied with the
power plant (tactile command not
compatible ED-TOUCH) or to
pilot with a command until 6
NEOTIME®



LANGUAGE CONTROL LON ref. LON

Communication Gateway
LON language



MULTIFUNCTION ZONE REGULATOR
ref. WONDERROOM

To associate with the versions
modulation of flow miss LOBBY®
(Constant pressure). Besides the
management of the zone.
Regulator communicates with the
power plan CARMA® In particular
for the functions(offices) free-
cooling / night-cooling.

• INSTALLATION



FLEXIBLE SLEEVE
ref. MTS MO

Circular except CARMA® 9070
rectangular.

Fire classification: M0
Male diameters (supply) / Female
(Central side)



SUPPORT FEET ref. PCB

Set of 4 (100 mm). For floor
mounting. Frame included as
standard for CARMA® 9070.



ROOF ref. DPC

Sheet 10/10th prelacquered



CANOPY WIRE
ref. AGC

Steel galvanized 10/10°.
Delivered flat ready to mount