

Nuaire, Western Industrial Estate, Caerphilly, CF83 1NA, United Kingdom. email:info@nuaire.co.uk

UK Commercial enquiries T:029 2085 8200 UK Residential enquiries T:029 2085 8500 International enquiries T:+44.29 2085 8497

Whilst the information given on this data sheet is fan specific, it is in summary and reference to the product selection catalogue and installation & maintenance documents is recommended.

This data sheet produced on 17 Jan 2022 14:16 using software version 5.4.4172.0

## Technical Data

### MRXBOX-ECO - Wall Mounted Multi Room Xbox

Fan Code: **MRXBOXAB-ECO3B**  
 Installation Manual Links: 671796

Required duty: 45 l/s at 100 Pa  
 Actual duty: 74 l/s at 270 Pa  
 Actual at required flow: 45 l/s at 419 Pa

#### When speed controlled to required duty (60.98%):

**Motor Input Power: 0.039 kW**  
**Specific Fan Power: 0.9 W/(l/s)**  
 Velocity at required duty: 2.547 m/s

#### At full speed:

Motor Input Power: 0.17 kW  
 Specific Fan Power: 2.3 W/(l/s)  
 Maximum Fan Speed: 3,300 RPM  
 Electrical Supply: 230V, 1 Phase, 50 Hz  
 Motor current (flc): 1.25 A

Max. operating temp: 40°C  
 Weight: 24 kg

Starting currents are nominal.

## Sound Data

Acoustic performance to ISO 13347 and AMCA 300.

Noise calculated speed controlled to required duty (60.98%)


Sound Power Levels re 1 pWatts (Hz):

Hz	63	125	250	500	1k	2k	4k	8k	dBA
Breakout	50	53	50	51	43	39	24	<16	33
Open Inlet (Intake & Extract)	41	50	54	48	43	37	24	<16	
Open Outlet (Supply & Exhaust)	50	58	57	60	57	55	45	34	

dBA is hemi-spherical at 3 metres. For spherical deduct 3 dBA.

Please note that the noise data stated on this data sheet for the unit and/or silencer is tested in accordance with UK, European and International industry laboratory standards. However onsite conditions may vary and we would recommend that this information is verified by an acoustic specialist in order to ensure its suitability for the intended application.

## Performance Chart

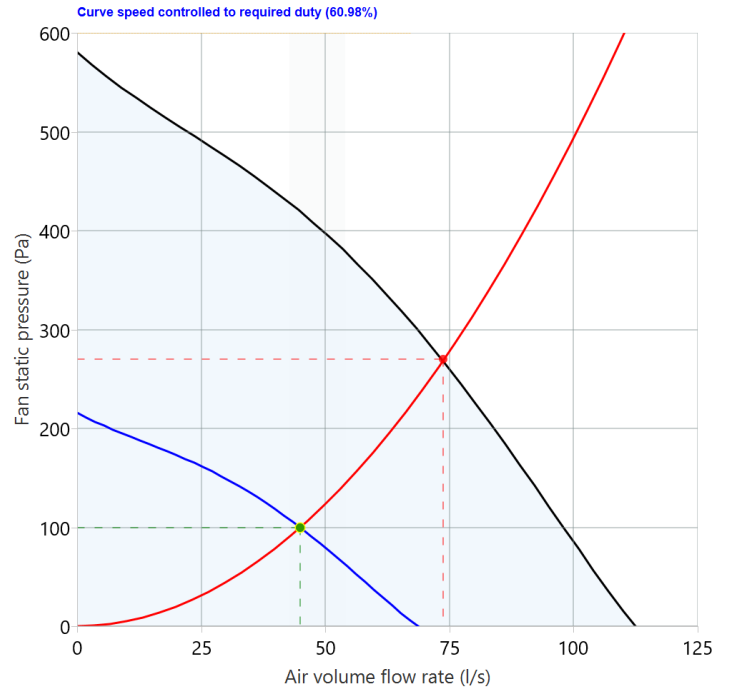

## Specification

The unit shall be fully insulated providing excellent thermal and acoustic characteristics and shall be complete with a multi plate counter flow high efficiency heat exchanger block, with a thermal efficiency of up to 95%. The heat exchanger shall be protected by filters on fresh air inlet and system extract. The heat exchanger and filters shall be accessible via the front access panel, enabling quick and easy maintenance.

The unit shall have low energy, high efficiency EC fan/motor assemblies with sealed for life bearings, the impellers shall be backward curved centrifugal type. The motors shall be suitable for an ambient temperature of 40°C.

The unit shall be supplied complete with a condensate drip tray and 21.5mm drain connection.

The unit shall be suitable for 150mm circular ducting.

The breakout noise level and power requirements shall be as detailed by the unit manufacturer and in accordance with the ventilation equipment schedule.

The unit shall be offered with a five year warranty. The product warranty applies to the UK mainland and in accordance with Clause 14 of our Conditions of Sale. Customers purchasing from outside of the UK should contact Nuaire International Sales office for further details.


Nuaire, Western Industrial Estate, Caerphilly, CF83 1NA, United Kingdom. email:info@nuaire.co.uk

UK Commercial enquiries T:029 2085 8200 UK Residential enquiries T:029 2085 8500 International enquiries T:+44.29 2085 8497

Whilst the information given on this data sheet is fan specific, it is in summary and reference to the product selection catalogue and installation & maintenance documents is recommended.  
This data sheet produced on 17 Jan 2022 14:16 using software version 5.4.4172.0

## Fan Dimensions

SPIGOT CONFIGURATION SHOWN IS VALID FOR THE STANDARD HANDED UNIT ONLY. OPPOSITE HANDED UNIT IS ALSO AVAILABLE UPON REQUEST.

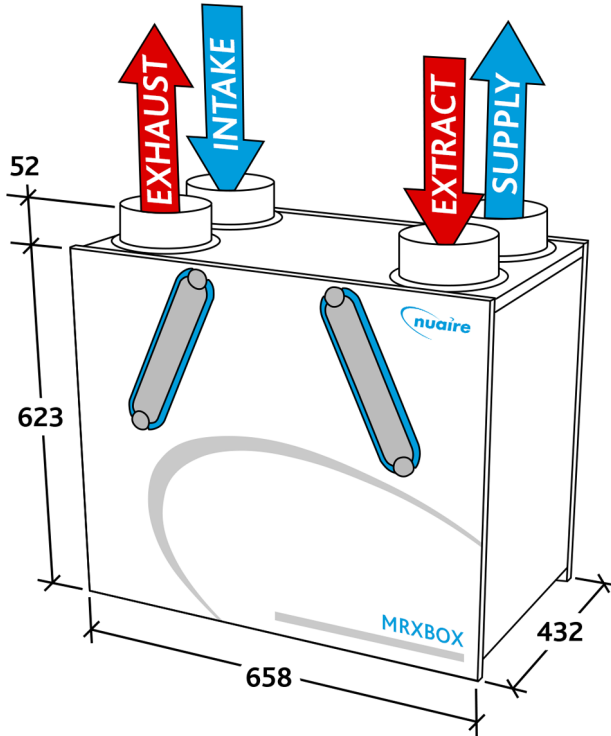

Length: Width: Height:  
432 658 623

Spigot size: 150

Duct size: 150

Drawing is for dimensional purposes only. Dimensions in mm.

## SAP Appendix Q Test Results

Application	Specific Fan Power (W/l/s)	Heat Exchange Efficiency %
Kitchen + 1 wet room	0.56	90%
Kitchen + 2 wet rooms	0.58	90%
Kitchen + 3 wet rooms	0.65	89%
Kitchen + 4 wet rooms	0.79	88%
Kitchen + 5 wet rooms	0.95	88%
Kitchen + 6 wet rooms	1.15	87%
Kitchen + 7 wet rooms	1.26	87%