


PRODUCT DATA SHEET

MW125FRS

FIRE RATED SUPPLY VALVE

W RAL9010

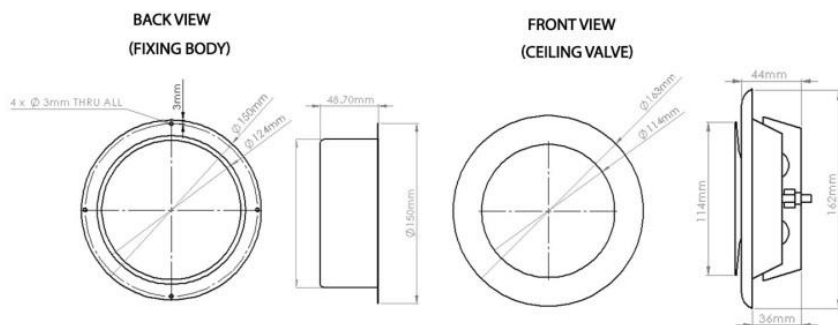

SPECIFICATION DETAILS

The MW125FRS 125mm diameter Round Fire Rated Supply Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside the System 125 duct.

The MW125FRS Supply Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.


The MW125FRS incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 1999 with 60 minute rating for ceilings.

MW125FRS has been designed for use with Verplas System 125 Round.

| | |
|---------------------------|--------------------|
| Manufacturer: | Verplas Ltd |
| Part Number: | MW125FRS |
| Size: | 125mm Diameter |
| For use with: | Verplas System 125 |
| Box quantity: | 7 |
| Individual Weight: | 334g |
| Colour: | White |

| | |
|---------------------------------------|------------------|
| MAX/MIN OPERATING TEMPERATURES | + 60°C to - 15°C |
|---------------------------------------|------------------|

PERFORMANCE CURVE

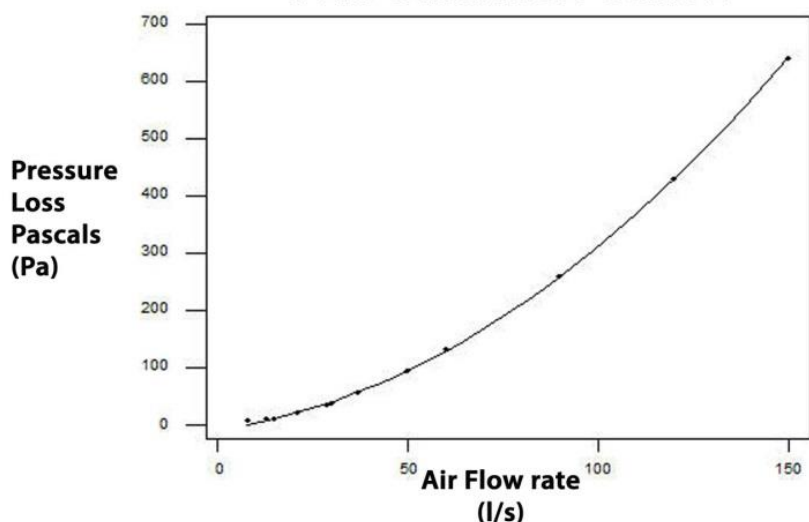

| AIRFLOW | RESISTANCE |
|---------|------------|
| 8 l/s | 6.00 pa |
| 13 l/s | 9.50 pa |
| 21 l/s | 19.50 pa |
| 30 l/s | 36.42 pa |
| 60 l/s | 132.00 pa |
| 120 l/s | 430.00 pa |

*Pressure losses with Control Disk 10mm open

Associated Ancillaries

