
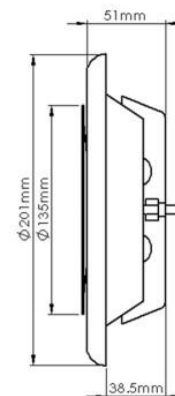


# PRODUCT DATA SHEET

## MW155FRS

### FIRE RATED SUPPLY VALVE

**W** RAL9010

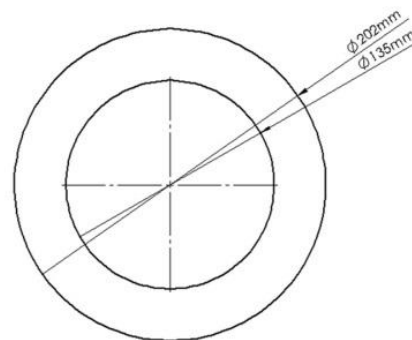

## SPECIFICATION DETAILS

The MW155FRS 150mm diameter Round Fire Rated Supply Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside the System 150 duct.

The MW155FRS Supply Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.


The MW155FRS incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 1999 with 60 minute rating for ceilings.

MW155FRS has been designed for use with Verplas System 155 Round.

<b>Manufacturer:</b>	Verplas Ltd
<b>Part Number:</b>	MW155FRS
<b>Size:</b>	150mm Diameter
<b>For use with:</b>	Verplas System 150
<b>Box quantity:</b>	7
<b>Individual Weight:</b>	510g
<b>Colour:</b>	White

<b>FIRE RATING</b>	60 Minutes
--------------------	------------

## PERFORMANCE CURVE

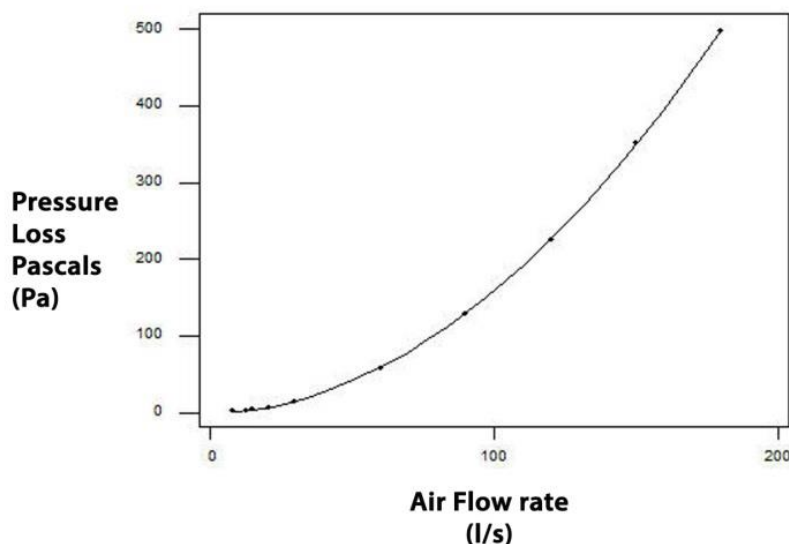

AIRFLOW	RESISTANCE
8 l/s	2.00 pa
13 l/s	3.00 pa
21 l/s	7.00 pa
30 l/s	14.50 pa
60 l/s	57.40 pa
120 l/s	227.00 pa

## Associated Ancillaries

