


PRODUCT DATASHEET

QV-TH-125-CON

Q-V Thermal 125mm pipe connector (Fire Retardant)

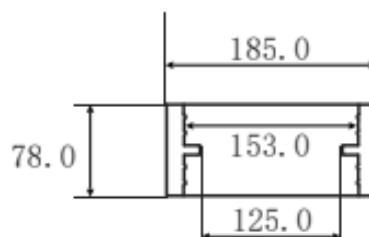

Product Overview

The Q-V Thermal Pipe Connector is a fire-retardant ducting solution designed for thermal insulation and air-handling systems. With a 125 mm internal diameter and a built-in connector, it ensures secure, efficient airflow and easy integration with Q-V Thermal Pipe sections.

Made from Expanded Polypropylene (EPP), it offers excellent resilience, impact resistance, and durability, recovering from repeated use without deformation. Flame-retardant to GB8624 Class B1 and undergoing testing for EN 13501-1 Class B, it combines structural strength with reliable fire safety.

Ideal for MVHR systems, industrial ducting, and ventilation applications, the Q-V Thermal Pipe Connector provides a long-lasting, thermally efficient, and fire-safe solution for connecting duct sections.


Technical Specification

Manufacturer	Quiet-Vent
Part Number	QV-TH-125-CON
Size	125mm
For Use With	QV Thermal 125
Weight	100g
Min Operating Temp	-15 °C
Max Operating Temp	+60 °C
Colour	Grey
Thermal Resistance	0.666 m ² K/W
Thermal Conductivity	0.03 W/mk

Performance

Airflow	Resistance
25 l/s	n/a
50 l/s	n/a
75 l/s	n/a
100 l/s	n/a
125 l/s	n/a
150 l/s	n/a

Easy Application

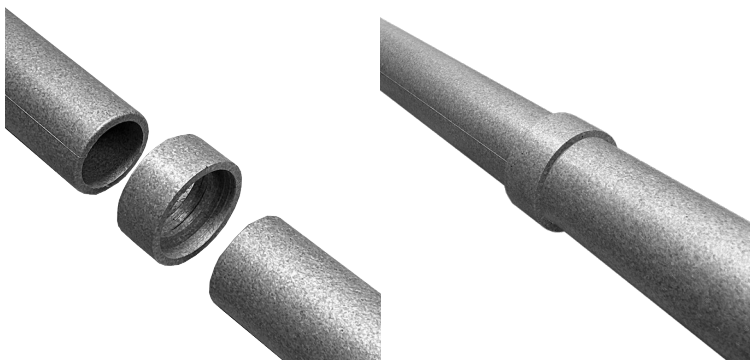

Related Products

Thermal pipework
QV-TH-125-P-1M




Thermal T piece
QV-TH-125-T



Thermal 90° bend
QV-TH-125-90-B




Thermal 200mm
to 150mm reducer
QV-TH-200-150-R



PRODUCT DATASHEET

QV-TH-150-CON

Q-V Thermal 150mm pipe connector (Fire Retardant)

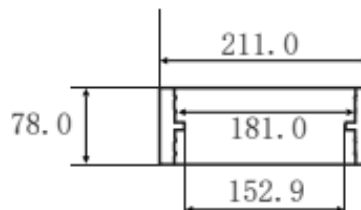

Technical Specification

Manufacturer	Quiet-Vent
Part Number	QV-TH-150-CON
Size	150mm
For Use With	QV Thermal 150
Weight	100g
Min Operating Temp	-15 °C
Max Operating Temp	+60 °C
Colour	Grey
Thermal Resistance	0.666 m ² K/W
Thermal Conductivity	0.03 W/mk

Product Overview

The Q-V Thermal Pipe Connector is a fire-retardant ducting solution designed for thermal insulation and air-handling systems. With a 150 mm internal diameter and a built-in connector, it ensures secure, efficient airflow and easy integration with Q-V Thermal Pipe sections.


Made from Expanded Polypropylene (EPP), it offers excellent resilience, impact resistance, and durability, recovering from repeated use without deformation. Flame-retardant to GB8624 Class B1 and undergoing testing for EN 13501-1 Class B, it combines structural strength with reliable fire safety.

Ideal for MVHR systems, industrial ducting, and ventilation applications, the Q-V Thermal Pipe Connector provides a long-lasting, thermally efficient, and fire-safe solution for connecting duct sections.

Performance

Airflow	Resistance
25 l/s	n/a
50 l/s	n/a
75 l/s	n/a
100 l/s	n/a
125 l/s	n/a
150 l/s	n/a

Easy Application

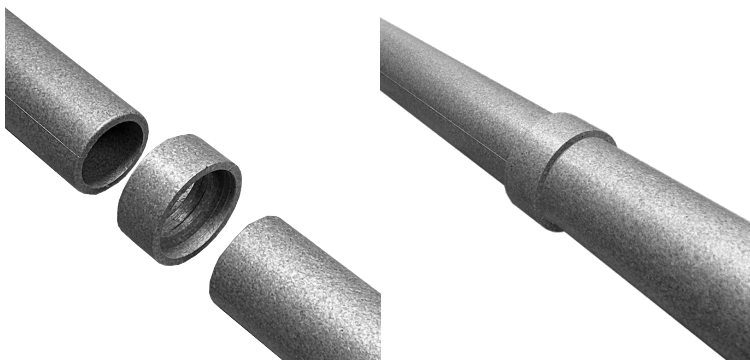

Related Products

Thermal pipework
QV-TH-150-P-1M




Thermal T piece
QV-TH-150-T



Thermal 90° bend
QV-TH-150-90-B




Thermal 200mm
to 150mm reducer
QV-TH-200-150-R



PRODUCT DATASHEET

QV-TH-200-CON

Q-V Thermal 200mm pipe connector (Fire Retardant)

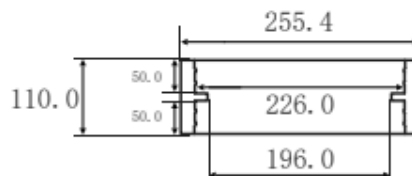

Technical Specification

Manufacturer	Quiet-Vent
Part Number	QV-TH-200-CON
Size	125mm
For Use With	QV Thermal 125
Weight	100g
Min Operating Temp	-15 °C
Max Operating Temp	+60 °C
Colour	Grey
Thermal Resistance	0.666 m ² K/W
Thermal Conductivity	0.03 W/mk

Product Overview

The Q-V Thermal Pipe Connector is a fire-retardant ducting solution designed for thermal insulation and air-handling systems. With a 125 mm internal diameter and a built-in connector, it ensures secure, efficient airflow and easy integration with Q-V Thermal Pipe sections.


Made from Expanded Polypropylene (EPP), it offers excellent resilience, impact resistance, and durability, recovering from repeated use without deformation. Flame-retardant to GB8624 Class B1 and undergoing testing for EN 13501-1 Class B, it combines structural strength with reliable fire safety.

Ideal for MVHR systems, industrial ducting, and ventilation applications, the Q-V Thermal Pipe Connector provides a long-lasting, thermally efficient, and fire-safe solution for connecting duct sections.

Performance

Airflow	Resistance
25 l/s	n/a
50 l/s	n/a
75 l/s	n/a
100 l/s	n/a
125 l/s	n/a
150 l/s	n/a

Easy Application

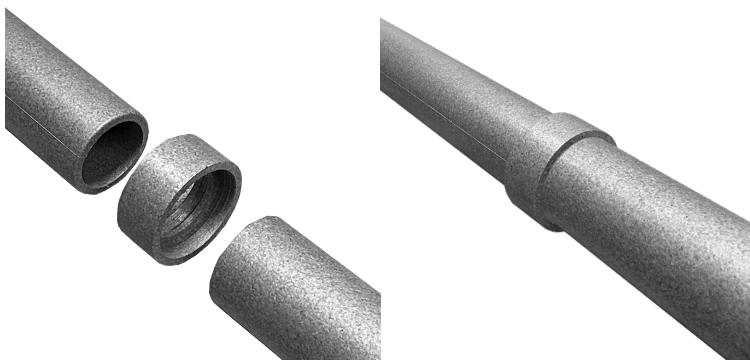

Related Products

Thermal pipework
QV-TH-200-P-1M



Thermal T piece
QV-TH-200-T



Thermal 90° bend
QV-TH-200-90-B



Thermal 200mm
to 150mm reducer
QV-TH-200-150-R

