


# PRODUCT DATA SHEET

## VSSC125PF

Rapid Self-Seal 125mmØ Duct to Fitting Coupling

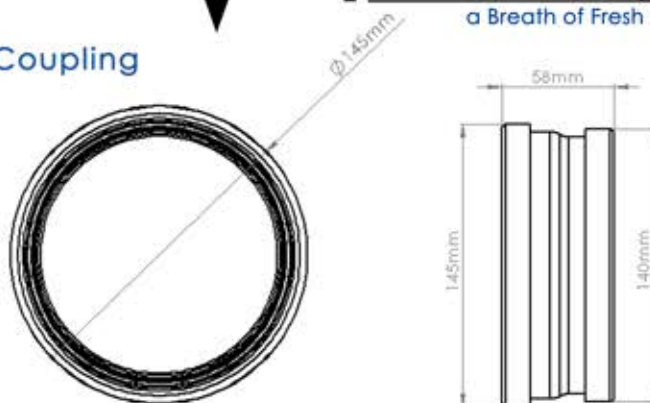

MANUFACTURER:	VERPLAS LTD
PART NUMBER:	VSSC125PF
SIZE:	125mmØ
FOR USE WITH:	VERPLAS SYSTEM 125
BOX QUANTITY:	60
INDIVIDUAL WEIGHT:	145g
COLOUR	White
MIN OPERATING TEMP	-15°C
MAX OPERATING TEMP	+60°C

### SPECIFICATION DETAILS

The VSSC125PF 125mm diameter Pipe to Fitting Self-Seal Coupling is manufactured from (white) High Impact Polystyrene and has a minimum free area of 11,462mm<sup>2</sup> (Pipe Side) to 10,533mm<sup>2</sup> (Fitting Side).


The VSSC125PF incorporates a gasket to reduce air leakage to an absolute minimum in connections between System 125 ducting and System 125 fittings.

VSSC125PF is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

VSSC125PF has been designed for use with System 125 Round.

AIRFLOW	RESISTANCE
8 l/s	0.16 pa
13 l/s	0.28 pa
21 l/s	0.80 pa
30 l/s	1.41 pa
60 l/s	4.36 pa
120 l/s	13.81 pa

### PERFORMANCE CURVE

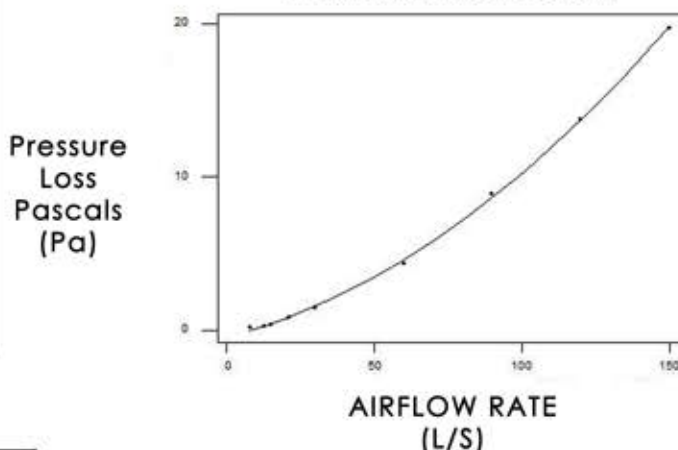

### Associated Ancillaries

VSSC350  
125mmØ Rapid Self-Seal  
90° Round Bend

VSSC352  
125mmØ Rapid  
Self-Seal Round T-Piece

VKC2692  
125mmØ 2m  
Round Pipe



Scan Here  
to find out  
how quick  
it is to install

