


PRODUCT DATA SHEET

VSSC220DD



Rapid Self-Seal 220x90mm Duct to Duct Coupling

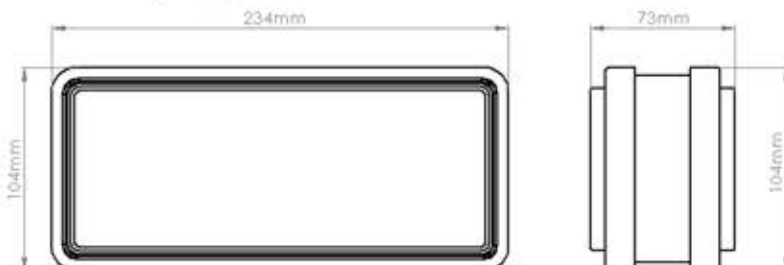

| | |
|--------------------|--------------------|
| MANUFACTURER: | VERPLAS LTD |
| PART NUMBER: | VSSC220DD |
| SIZE: | 220x90mm |
| FOR USE WITH: | VERPLAS SYSTEM 220 |
| BOX QUANTITY: | 36 |
| INDIVIDUAL WEIGHT: | 236g |
| COLOUR | White |
| MIN OPERATING TEMP | -15°C |
| MAX OPERATING TEMP | +60°C |

SPECIFICATION DETAILS

The VSSC220DD 220x90mm Self-Seal Coupling Duct to Duct is manufactured from (white) High Impact Polystyrene and has a minimum free area of 16,790mm². The Self-Seal Coupling incorporates a gasket to reduce air leakage to an absolute minimum between System 220 ducting.


The VSSC220DD is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.

VSSC220DD is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

VSSC220DD has been designed for use with Verplas System 220.

| AIRFLOW | RESISTANCE |
|---------|------------|
| 8 l/s | 0.013 pa |
| 13 l/s | 0.022 pa |
| 21 l/s | 0.035 pa |
| 30 l/s | 0.050 pa |
| 60 l/s | 0.10 pa |
| 120 l/s | 0.39 pa |

PERFORMANCE CURVE

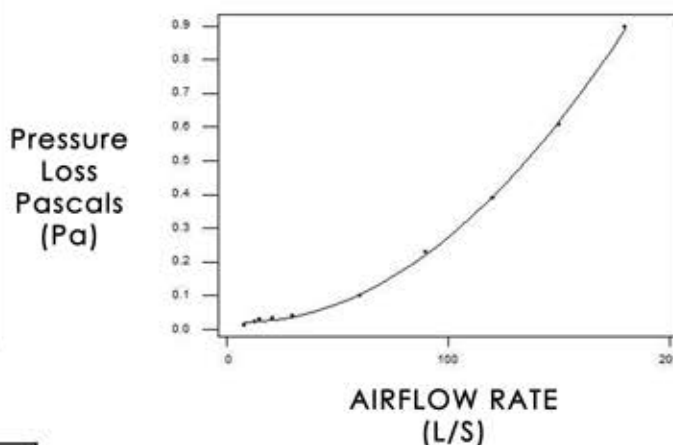

Associated Ancillaries

VSSC5705
220x90mm Rapid Self-Seal
90° Horizontal Bend

VSSC220DF
220x90mm Duct to
Fitting Connector

VKC5729
220x90mm
2m Flat Channel



Scan Here
to find out
how quick
it is to install

